

Power supply DRP-480S-24



The advantages :
 Switched input voltage selection -
 Protection against short-circuit/over-voltage/overload - Installation on DIN RAIL -
 Passive shape factor corrector - 3-year warranty

mean well

24 VDC


Mains voltage	90 / 132 - 180 / 264 VAC
Output voltage	24 VDC
Adjustment range	24 à 28 VDC
Regulation tolerance	+/- 1%
Max output current	20 A
PROTECTION:
Output overload	105 à 150%
Short-circuit to output	oui
Short-circuit to output	Yes
ENVIRONMENT:
EMC, emissions	EN55022 class B
EMC, sensitivity	3EN61000, ENV50204
User safety	UL1012, UL60950-1
Operating temperature	-20 à +50°C@100%
CONNECTIONS:
Mains input	Bornier 3 points à vis
Output	Bornier 4 points à vis
Display	LED de mise sous tension
MECHANICAL:
Overview	Coffret en plastique peint
Dimensions Lgth. X Wdth.	227 x 125.2 x 100
Mounting	Rail DIN TS35 / 7.5 ou 15
Weight	2600 g

AFFECTATION DES CONTACTS (TB1)

CONTACT N°	AFFECTATION
1	AC/L(DC+)
2	AC/N(DC-)
3	FG ⊕

AFFECTATION DES CONTACTS (TB2)

CONTACT N°	AFFECTATION
1,2	DC OUTPUT +V
3,4	DC OUTPUT -V

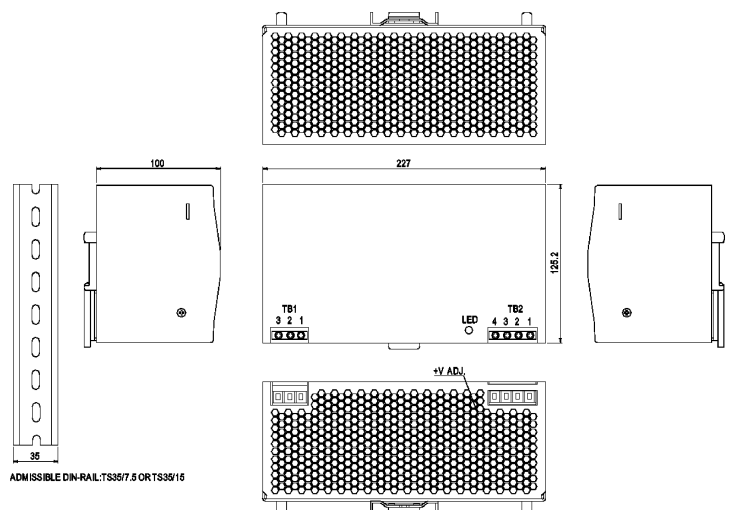

DRP480

Version of 06/07/2022