


Power supply RS-150-24


- The advantages :**
- Universal AC input voltage
 - Protection against: short-circuit/over-voltage/overload
 - Cooling via natural convection



mean well

24 VDC

| | |
|--------------------------|---------------------------|
| Mains voltage | 88 / 264 VAC - 248 / 373 |
| Output voltage | 24 VDC |
| Adjustment range | 22,8 à 26,4 VDC |
| Regulation tolerance | +/- 1% |
| Max output current | 6.5 A |
| PROTECTION: | |
| Output overload | 110 à 150% |
| Short-circuit to output | oui |
| Short-circuit to output | Yes |
| ENVIRONMENT: | |
| EMC, emissions | EN55022 class B |
| EMC, sensitivity | EN61000-6 , EN61000-4 |
| User safety | UL60950-1 |
| Operating temperature | -25 à +70°C |
| Storage temperature | -40 à +85°C |
| CONNECTIONS: | |
| Mains input | Bornier 3 points à vis |
| Output | Bornier 4 points à vis |
| Display | LED de mise sous tension |
| MECHANICAL: | |
| Overview | Sans boîtier |
| Dimensions Lgth. X Wdth. | 199x98x38mm |
| Mounting | Vis diamètre 3.5mm et Vis |
| Weight | 700 g |

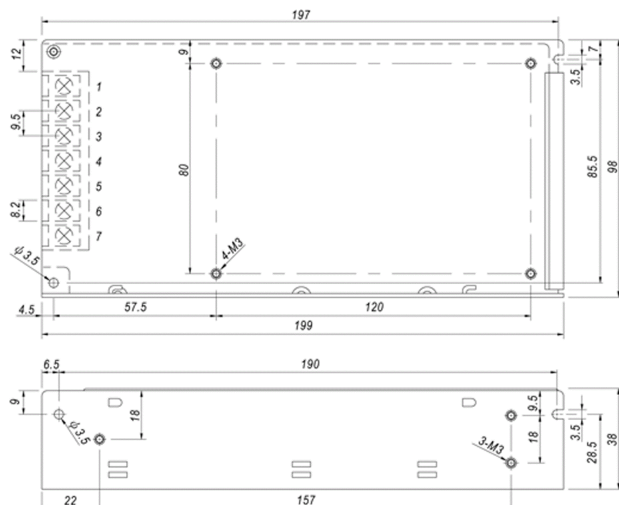

Terminal Pin No. Assignment

| Pin No. | Assignment | Pin No. | Assignment |
|---------|------------|---------|--------------|
| 1 | AC/L | 4,5 | DC OUTPUT -V |
| 2 | AC/N | 6,7 | DC OUTPUT +V |
| 3 | FG | | |