

Brushless technology Controller DC 2000 7 pouces



The advantages :
Automated drive with integral 7" touchscreen HMI - CANOpen, Ethernet, EtherCAT, integral I/O - programming language in accordance with the IEC 61131 standard - Codesys V3 programming



Associated products :

> Power supply
DRP-240-24

mdp

0 Quadrant(s) - 0 W

| | |
|---------------------------|------------------------|
| Power supply voltage | 24 V |
| Programming | Codesys V3 |
| Description | Entrées: 4 ETOR |
| Description. | Sorties: 4 STOR |
| Analog | 4 EANA |
| CAN link | RJ45 CAN et ETHERCAT |
| Graphic interface display | Ecran tactile 7 pouces |
| Operational | 0..50°C |
| Storage | -20..70°C |
| Relative humidity | 85% |

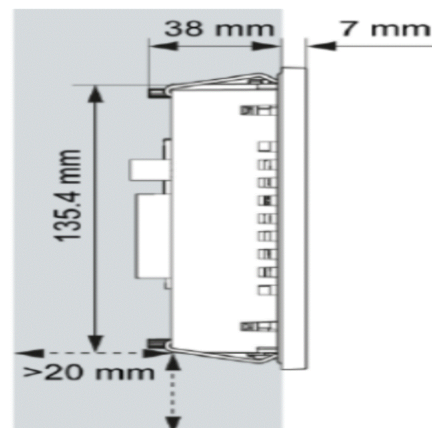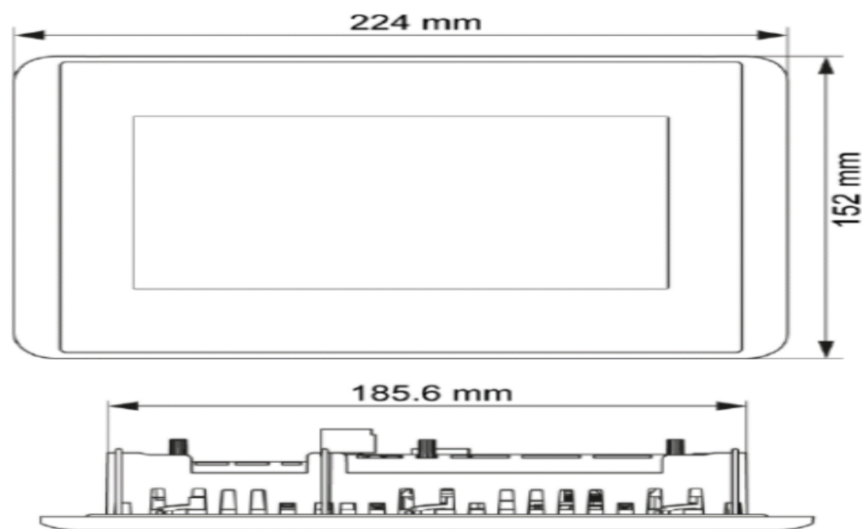

Edition:Juli 2022 / subject to modification

Version of06/07/2022